

# The Evolution of Strength, Beauty & Simplicity

## Easy Base™, the patented design process that Solidifies the Shower Base

- Polyurethane fill the contours to solidify and strengthen the bottom of shower unit.
- Steel rod reinforcement is encapsulated within the polyurethane for added strength for the threshold.
- Reinforcement materials are then machined to a flush, level surface.



## Easy Base™, saves Construction Time & Money

- Greatly simplifies the installation procedure
- Reduces installation time by over 50 percent.
- Minimum use of mud, now needed only in the drain area
- Pre-Leveled Shower Unit is ready to install on a level surface.

## Reduces Installation Risks

Easy Base™ minimizes the risk of Soft Shower Bottoms.


Easy Base™ minimizes the risk of Water Drainage Problems.

Gelcoat Fiberglass surface creates the smooth, beautiful, long lasting shower surface.

Fiberglass resin structural substrate cures to a seamless, strong encasement shell.

Polyurethane reinforcement, machined to a flush, level surface.

Steel rod, embedded into reinforcement to strengthen threshold.

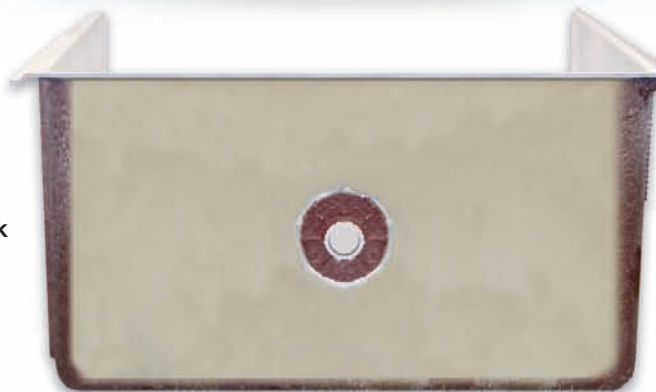

STRONG, LEVEL, SIMPLE



Easy Base™, the patented design process for factory reinforced shower bottoms provides our customers with a pre-leveled shower unit that is ready to install on a level surface. This problem solving feature is of tremendous benefit to construction plumbers, developers and owners by saving installation time and money, and minimizing risk of water drainage problems and soft shower bottoms.

On March 7, 2006 The Praxis Companies, LLC. was awarded patent number 7,007,315, which provides Praxis the exclusive right to manufacture and sell the self-sustaining base, marketed as **Easy Base™**.



RESIDENTIAL & COMMERCIAL  
Gelcoat, Acrylic & Solid Surface